


With hall sensor ECD2459S-...		1207	2407				
Motor data							
Values at nominal voltage							
1	Nominal voltage	V	12	24			
2	No load speed	rpm	7699	7655			
3	No load current	mA	114	73			
4	Nominal speed	rpm	6958	6597			
5	Nominal torque	mNm	14	20			
6	Nominal current	A	1.07	0.75			
7	Stall torque	mNm	145	145			
8	Stall current	A	10	4.98			
9	Max. efficiency	%	79.8	77.2			
10	Supply voltage +Vcc	V	10..28	10..28			
11	Direction of rotation		CW	CW			
12	Torque constant	mNm/A	14.7	29.5			
13	Speed constant	rpm/V	649	324			
14	Speed/torque gradient	rpm/mNm	52.9	52.9			
15	Mechanical time constant	ms	3.3	3.3			
16	Rotor inertia	gcm ²	5.9	5.9			

17	Thermal resistance housing-ambient	10.2 K/W
18	Thermal resistance winding-housing	6.4 K/W
19	Thermal time constant winding	36 s
20	Thermal time constant motor	555 s
21	Ambient temperature	-30...+100°C
22	Max. permissible winding temperature	+150°C
23	Max. permissible speed	30000 rpm
24	Axial play at axial load <4 N	0 mm
	>4 N	max. 0.3 mm
25	Radial play	preloaded
26	Max. axial load (dynamic)	3.5 N
27	Max. force for press fits (static)	44 N
	(static, shaft supported)	1200 N
28	Max. radial loading, 5mm from flange	15 N
29	Number of pole pairs	1
30	Number of phases	3
31	Weight of motor	130 g

Operating Range

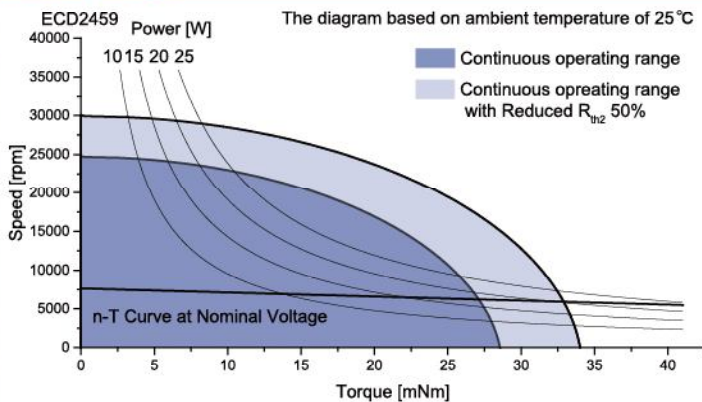

Controller features	
Sensor	Open loop, I _{max} < 1.5A
Overload protection	Stall protection
Max. temperature of electronics	+105°C

Connection

Connection		PTFE	
Pin 1	+VCC	AWG24	red
Pin 2	GND	AWG24	black

Caution:
 Incorrect lead connection will damage the controller!

Configuration

Function: On&Off/Direction/Speed control/Brake
 Speed closed&open-loop Control/Speed feedback
 Performance: Customized in the continuous operating range
 Ball bearing: Preload
 Flange: Standard frange front&back/customize the frange
 Shaft: Length/Diameter/Cut face
 Leadwire: PVC/Silicon/Teflon/UL No/Dimension/length
 Connector: JST/MOLEX/TE

More :
 Please contact our sales engineers